

# ATHENIA™ MKII SERIES

— HVAC roof units for diesel/CNG buses —



### Lower fuel consumption and high passenger comfort

The Athenia™ MkII product range offers the highest ratio between cooling capacity and unit weight, featuring extra light aluminium frames and plastic covers. The Athenia™ MkII unit is equipped with a servo-motor controlled fresh air damper, that provides 100% fresh air while reducing fuel consumption.

For the highest passenger comfort, the CANAIRE® control system can manage up to three temperature zones with precise temperature control for single, articulated and double-articulated buses. CANAIRE® modular expandable control system manages efficient operation and low power consumption through continuous RPM control for fans and blowers.

The CANAIRE® control system features an ergonomically designed LCD driver panel that allows for the control of

A/C roof units in parallel with a front-box unit placed in the driver's area. It maximizes the efficiency of such system configurations, while lowering the fuel consumption of the bus.

To further improve air quality and passenger comfort, the AdvanTech™ Fresh Air control option manages the fresh air intake volume based on internal air quality measurement.

Built-in CO<sub>2</sub> sensors can be added on demand. For additional fuel optimisation, the CANAIRE® controller offers customisation features that allow system parameterisation changes, via service and diagnostic software tools, in alignment with operating conditions and customer needs.

### Environmental impact

With its innovative micro-channel coils (with a reduced refrigerant charge of 50% compared to conventional coils), the Athenia™ MkII series offers an improved environmental performance with a low global warming potential (GWP).


To improve environmental-friendliness, we offer refrigerant circuit installation packages, minimising the risk of refrigerant leakages from A/C systems.

For additional safety, we only use non-flammable refrigerants with an A1 classification.



HIGH  
PERFORMANCE

LOW CO<sub>2</sub>  
LOW NOISE

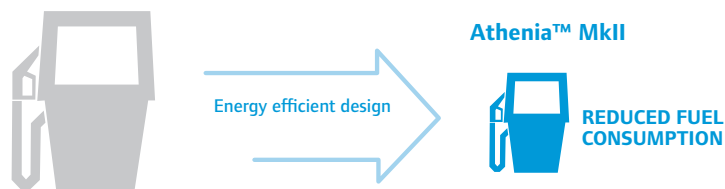

### Low noise

As a standard solution we are offering step-less RPMs regulation of the fans and blowers.

The brushless blowers and fans with full speed PWM control can be used in Athenia™ MkII range for lowering the noise level.





QUALITY CONTROL  
(ISO 9001:2008, ISO 14001:2004, BS OHSAS 18001:2007)

### Reliability

Thermo King products are built to last. We continuously test and develop our designs to meet the high demands of bus temperature control applications. We only use the most reliable and internally validated components in our A/C systems.

We carry out a range of rigorous functional and performance tests to validate all our transport refrigeration equipment in a controlled environment such as special 3D multi-axial vibration and twist profiles tests. They regularly exceed the standard bus homologation requirements (ECE R10.05).


Our Thermo King manufacturing plant is ISO 9001: 2008, ISO 14001: 2004 and BS OHSAS 18001: 2007 accredited to demonstrate our dedication to quality and reliability.

### Ease-of-use and service

Athenia™ MkII units are designed to be compatible with bus roofs with a radius from 7,5m to flat. To increase the flexibility of usage, the units are available for screw or glue bus roof installation.

All Athenia™ MkII units are compatible with a wide range of compressor dimensions and installation space limitations, helping to extend the application areas.

Athenia™ MkII's ergonomic unit design ensures faster access to components, thus minimising maintenance and service time.

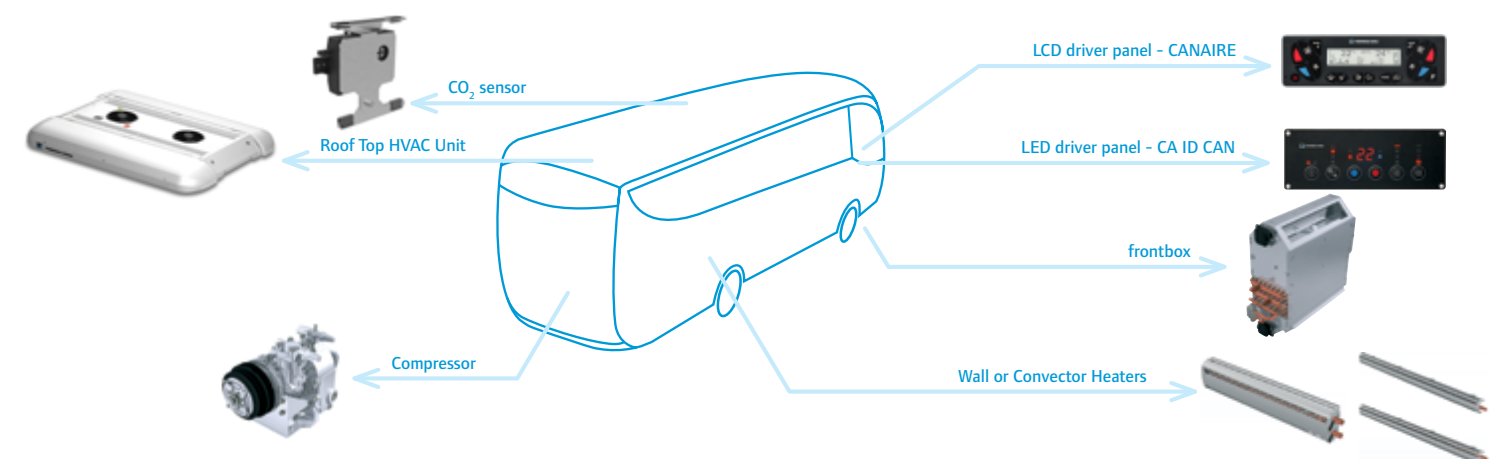



### Thermo King Dealer Network for low cost of ownership

Athenia™ MkII owners have access to Thermo King's worldwide dealer and service network that helps to minimise cost of ownership and maximise uptime. Thermo King Dealers have been servicing transport temperature control equipment for more than 75 years now.

#### Our Dealer Service Network:

- More than 500 service points in 75 countries
- Non-stop availability 24/7/365
- Always in your area: most locations are within a two-hour drive
- Direct telephone contact
- Immediate assistance in your language
- Optimised fleet maintenance

#### Our qualified CERTI-TECH technicians:

- Fully trained & certified
- Gold, silver and bronze CERTI-TECH expertise certifications
- > 1,400 CERTI-TECH trained and certified service technicians

For more information, visit: [dealers.thermoking.com](http://dealers.thermoking.com)



### ATHENIA™ MkII SERIES

SPECIFICATIONS	S-500	S-700	S-805	S-960
<b>Layout unit</b>	<b>Narrow (N) Wide (W)</b>			
Listed cooling capacity <sup>1</sup> [kW] / [kBtu/h] / [kcal/h]	25 / 85 / 21500	32 / 109 / 27500	40 / 136 / 34400	45 / 153 / 38700
Rated cooling capacity <sup>2</sup> [kW] / [kBtu/h] / [kcal/h]	14,0 / 48 / 12000	20,7 / 71 / 17800	24,3 / 83 / 20900	27,0 / 92 / 23200
Heating capacity <sup>3</sup> [kW] / [kBtu/h] / [kcal/h]	33 / 112 / 28400	33 / 112 / 28400	47 / 160 / 40400	47 / 160 / 40400
Evaporator air capacity <sup>4</sup> [m³/h]	4400 (4920)	4400 (4920)	6600 (7380)	6600 (7380)
Fresh air range [%]	0-100	0-100	0-100	0-100
Current draw <sup>5</sup> [A]	54 (65)	63 (74)	81 (92)	90 (101)
Dimensions roof unit (W x L x H) [mm]	1850 x 2300 x 215 (N) - 2100 x 2300 x 215 (W)			
Refrigerant type / average filling volume [kg]	R134a / 2,2	R134a / 3,7	R134a / 3,7	R134a / 3,8
Weight (cool/cool+heat) [kg]	125 / 131 130 / 136	131 / 137 136 / 142	141 / 147 146 / 152	146 / 152 151 / 157
Control system	CANAIRES (EN/DE/CZ/IT/FR/SP)			
Compressors options	TM31	TM31, TK X430, FKX 40/470, S616, S391	TK X430, FKX 40/560, FKX 40/655, S616, S391	TK X430, FKX 40/560, FKX 40/655, S616, S391
Split system option availability <sup>6</sup>	No	No	Yes (S-805 Split)	Yes (S-960 Split)
Driver unit evaporator extension availability	Yes (DS-500)	Yes (DS-700)	Yes (DS-805)	Yes (DS-960)

<sup>1</sup> - Simulated at conditions 40°C/40°C/95%

<sup>2</sup> - Measured at conditions 35°C/27°C/19°C

<sup>3</sup> - Measured at conditions -20°C/+80°C/16,7 l/min

<sup>4</sup> - Free blow capacity for brush (brushless) blowers

<sup>5</sup> - Current consumption for unit only at 27 VDC (unit with compressor clutch and pump)

<sup>6</sup> - For split systems 2 smaller compressors can be used instead of one

S-805



S-960



S-500 & S-700







Thermo King – by Trane Technologies (NYSE: TT), a global climate innovator – is a worldwide leader in sustainable transport temperature control solutions. Thermo King has been providing transport temperature control solutions for a variety of applications, including trailers, truck bodies, buses, air, shipboard containers and railway cars since 1938.

For further information  
[europe.thermoking.com](https://europe.thermoking.com)

Find your nearest dealer on  
[dealers.thermoking.com](https://dealers.thermoking.com)

TRANE  
TECHNOLOGIES