



TOMORROW'S TECHNOLOGY TODAY

Operators of refrigerated fleets have always faced significant challenges. From the earliest days of ice, they strove to deliver temperature sensitive cargo in prime condition. Today, added to this basic requirement are:

- economy of operation,
- ability to meet rapidly changing needs,
- environmental sustainability.

Even in our highly competitive and environmentally conscious world, the full electric FK Series dependably exceeds all these demands due to its unique technology:

COST REDUCTION

Switching to the FK series delivers a quick return on investment, thanks to substantial gains in fuel economy and uptime.

ASSET UTILIZATION

The FK Series leverages its innovative design features to give all area access, increased load capacity, high reliability and exceptional load protection. Put simply, you gain increased utilization of your assets.

FUTURE READINESS

No need to be concerned about future environmental regulations; the FK Series leads the market in the reduction of CO_2 and noise emissions.

FLEXIBILITY

Discover the FK Series and you discover the power of choice including compartment configuration and vehicle type.

WITHIN THE EXTENSIVE FK SERIES YOU WILL FIND A MODEL IDEALLY MATCHED TO YOUR NEEDS. FROM THE SMALLEST TO LARGEST VEHICLES IN THE SMALLEST TO LARGEST FLEETS.

FK SERIES A MODEL FOR EVERY APPLICATION

FOR RIGID TRUCKS

Extremely rapid pulldown and recovery makes the FK Series ideal for multi-drop operations. Zero-intrusion evaporators give you full use of your available load space. Massive capacity of up to 32,000 W at 0°C ensures total protection of the most sensitive loads. The unique hydraulic tilt feature allows ample space to accommodate higher cabs. Low GWP R410A refrigerant has the dual benefit of high performance with future-ready environmental credentials.









URBAN MULTI-DROP

FK SERIES MEETING NEEDS WITH SUSTAINABLE INNOVATION

COST REDUCTION

The savings gained when you switch to the FK Series will outweigh the initial premium, giving you an ROI in less than 4 years. An exceptionally efficient design contributes fuel savings of up to 60% while fewer moving parts result in more reliability and less downtime.

ASSET UTILIZATION

Thanks to its whisper quiet operation, the FK Series enables you to access noise sensitive areas. Industry leading cooling capacity provides the pulldown and recovery performance you need for the toughest multi-drop operations. Our low intrusion evaporators increase the available load space. Eliminating the need for an internal combustion engine creates a low weight unit with impressively high reliability.

FUTURE READINESS

The FK Series is simply the most sustainable system on the market, exceeding all current environmental regulation by a comfortable margin. The secret is in the concept: having no engine to provide emissions, using the latest low GWP refrigerant, reducing CO_2 by 60% and meeting all LEZ requirements are welcome achievements.

On top of these, you will be investing in a unit which adapts to all leading vehicle designs and has future vehicle compatibility, whether the power source is LNG, CNG or electric. Most importantly, a fleet equipped with the FK Series sends out a powerful customer message, clearly demonstrating your commitment to sustainable operation.

FLEXIBILITY

Whatever your current and future needs, the FK Series has the flexibility to satisfy them. Choose single or multi-temp, pick the evaporators you want from our wide range and be confident that whatever your performance needs, we have a unit with the appropriate cooling capacity. Importantly, our adaptable solutions have been approved by the major vehicle OEMs and we enjoy strong links with those companies for cooperation during their product development.

4



HOW IT WORKS


A high-performance alternator is directly driven by the vehicle engine. The alternator supplies electricity with minimal energy transfer losses. In the case of a HV e-truck, the electricity is supplied by the battery pack. The Power generated passes to the full electric unit via an inverter. The inverter modulates the current so that the electric motors for compressor and fans can operate with optimum control and efficiency.

WHAT IT DELIVERS

Our innovative alternator drive is compact, light-weight, low noise, low emission and highly reliable with very few moving parts. In addition, you benefit from extremely low operating costs thanks to a market-leading operating efficiency of 96%.

HOW IT COMPARES

Our electric refrigeration solution offers the best for you and for the planet.

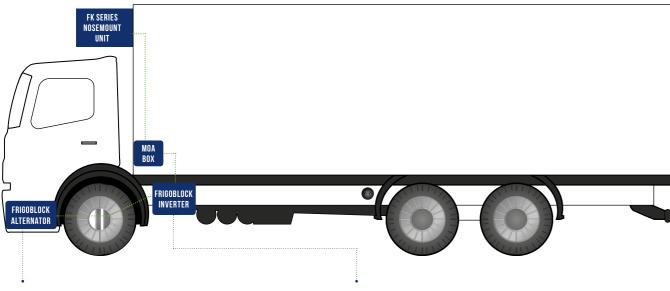

ALTERNATOR

Transforms electricity from alternator to power the FK refrigeration unit

INVERTER

Delivers constant voltage and frequency to the unit regardless of vehicle engine speed. Guarantees rapid start-up of the unit with low mechanical stress. Provides optimum load temperature control with minimum power consumption.

SUSTAINABLE INNOVATION

SIMPLE. POWERFUL. EFFICIENT.

OUR PROVEN INVERTER TECHNOLOGY

Advanced design means you can enjoy a choice of operating profiles, while also benefiting from reduced energy consumption and increased service life. Inverter technology allows cooling capacity and temperature control to be optimized regardless of vehicle engine speed, while also making rapid unit start-up a useful bonus.

FLEXIBILITY AND CHOICE

Choose the operating profile that best suits your cargo, your customer and your location: Lowest noise, lowest energy consumption or highest cooling capacity.



BENEFITS

Innovative use of our inverter system means reduced energy requirements, improved load quality and longer component life.

BUILT ON EXPERIENCE

With over 10,000 full electric units in service, no other manufacturer has more experience, a wider product portfolio or a more extensive service network. Our highly trained and certified technicians will provide preventative maintenance, parts supply and emergency support. In fact, everything you need to keep your fleet in peak condition and your operation running to full capacity.

SIMPLE OPERATION CONTROL AND MONITORING TO ELIMINATE ERRORS

The Frigoblock in-cab controller displays vital information and enables simple but effective control of temperatures, set-points and defrosting.

CHOOSE

FITS WHERE YOU WANT IT: RADIO SLOT, DASHBOARD, LOADING AREA

ACT

ONE KEY PRESS TO CHANGE SET-POINT

INFORM

INTEGRATED HOUR METER

CONNECT

CAN-BUS NETWORK FOR MONITORING, PROGRAMMING AND UPDATES

CONTROL

INITIATE AND MONITOR DEFROST

MONITOR

VIEW ALL COMPARTMENTS



CHOICE TO MEET YOUR PRECISE NEEDS

Choice means being able to pair your Frigoblock FK unit with the evaporators **you** need for **your** operation. Our ultra-slim evaporators can be used in split combinations but also when you need additional units in your multi-compartment trucks. Thanks to their compact design, a multitude of multi-compartment solutions are possible with optimum load space.

SINGLE DISCHARGE



RE 42-1


DUAL DISCHARGE




MULTIPLE CONFIGURATION OPTIONS


Possible 2 zones configuration FK Series





Possible 2 zones configuration FK 25 i





8

TECHNICAL INFORMATION

FK UNITS		FK13L		FK13		FK25L		FK25		FK25I		
Integrated evaporators												
Return air / ambient temperature		°C	0/30	-20 / 30	0/30	-20 / 30	0/30	-20 / 30	0/30	-20 / 30	0/30	-20 / 30
Defrigaration Canacity*	50 Hz	W	8,600	4,500	11,500	6,200	12,900	7,500	17,400	9,900	19,000	10,600
Refrigeration Capacity*	60 Hz	W	Up to 20 % more refrigeration capacity with Inverter-Filter Boost mode					de				
Defrost Capacity (Hotgas)		W	up to 18,000		up to	24,000	up to 28,000		up to 35,000		up to 40,000	
Handing Committee (Flanksia)	50 Hz	W	6,100		6,7	100	7,3	300	7,300			
Heating Capacity (Electric)	60 Hz	W	6,600		6,6	500	8,200		8,200			
Refrigerant			R 410A		R 4	10A	R 410A		R 410A		R 410A	
Airflow**		W	2,870		2,870 3		3,0	616	3,0	616	-	
AIITIOW^^	60 Hz	W	3,400		3,400 4,15		150	4,1	150	6,4	100	
Weight		kg	257		257		324		324		410	
Dimensions (H+W+D; Host Unit)		mm	565*1965*620		565*1965*620		640*2315*660		640*2315*660		576*2180*995	
COMPRESSORS												
Cyclinders			2		2		4		4		4	
Displacement		m³/h	16	5.8	24	4.4	33	3.3	48	8.2	5	8.1

^{*} ATP conditions - ** DIN EN ISO 5801

ALTERNATORS		G17	G24	AW22.5	AW30
Capacity		17.32	24.25	22.5/28.0	30.0/37.5
Voltage		400	400	400/500	400/500
Frequency		50	50	-	-
Current		25	35	32	43
Speed		3,000	3,000	3,000	3,000
Dimensions					
Length	mm	460	560	336	411
Height	mm	214	214	187	187
Width	mm	245	245	187	187
Shaft	mm	43	43	30	30
Weight	kg	76	98	49	60

Cubinat ta	tackaical	ahanaaa	i+h-a+	prior notice	
aublectio	recondical	chanaes	WHITICHE	DHOLDOUGE	

REMOTE EVAPORATORS		RE42-1	RE11-2	RE22-2	RE44-2
Airflow volume (ATP Conditions)	m³/h	3,444	1,620	3,245	5,589
Air throw, without ducting	m/sec	6-7	6-7	6-7	6-7
Fans		2	1	2	4
Discharge		Single	Dual	Dual	Dual
Dimensions					
Height*	mm	140	160	160	140
Length	mm	680	1,120	1,120	1,020
Width	mm	2,160	720	1,160	2,160
Weight	kg	52	46	74	92

^{*} can be recessed 40mm into the roof



DISCOVER THE COMPLETE ELECTRIC RANGE

EK SERIES

For your low-height truck bodies or throughloading trailers, choose a split refrigeration solution with a chassis mounted EK condenser and the RE evaporator.

DK SERIES

If you require temperature control in large-volume truck-trailer combinations and swap bodies, you can fully integrate the DK refrigeration unit as well as the RE evaporator into the roof of the body.

HK SERIES

This front wall mounted refrigeration unit keeps your drawbar combinations and semi-trailers at the right temperature. The integrated evaporator lets you use all your precious loading space.

DISCOVER OUR FULL PRODUCT RANGE,
ALL TECHNICAL SPECIFICATIONS AND OUR
EXTENSIVE '24/7/365' SERVICE NETWORK

AT WWW.FRIGOBLOCK.COM



FRIGOBLOCK GmbH is a brand of Thermo King®. Thermo King – by Trane Technologies (NYSE: TT), a global climate innovator – is a worldwide leader in sustainable transport temperature control solutions. Thermo King has been providing transport temperature control solutions for a variety of applications, including trailers, truck bodies, buses, air, shipboard containers and railway cars since 1938.